

Datasheets

BD50F Direct Current Compressor

R134a, 12/24V DC & 100-240V AC 50/60Hz

General

Code number (without electronic units)	101Z0203	Approvals
Electronic unit 12/24V DC - Standard	101N0212, 30 pcs: 101N0213	—
Electronic unit 12/24V DC - AEO	101N0340, 30 pcs: 101N0341	UL
Electronic unit 12/24V DC & 100-240V AC 50/60Hz	101N0510, 28 pcs: 101N0511	UL / VDE
Electronic unit 12/24V DC - Automotive	101N0650, 30 pcs: 101N0651	UL
Compressors on pallet	150	

Application

Application	LBP/MBP/HBP
Evaporating temperature °F	-20 to 50
Voltage range DC VDC	9.6 - 17 / 21.3 - 31.5
Voltage range AC V/Hz	100 - 240 / 50 - 60
Max. condensing temperature continuous (short) °F	140 (158)
Max. winding temperature continuous (short) °F	257 (275)

Cooling requirements

Application	LBP	MBP	HBP
32°C	S	S	F ₁
38°C	S	S	F ₁
43°C	S	S	F ₁
Remarks on application: Fan cooling F ₁ depending on application and speed.			

Motor

Motor type	variable speed
Resistance, all 3 windings (25°C) Ω	1.8

Design

Displacement cu.in.	0.15
Oil quantity (type) fl.oz.	5.1 (polyolester)
Maximum refrigerant charge oz.	10.5
Free gas volume in compressor fl.oz.	29.6
Weight - Compressor/Electronic unit lbs.	9.5 / 0.42 (Standard)


Standard battery protection settings (refer to electronic unit *Instructions* for optional settings)

Voltage	12V	24V
Cut out VDC	10.4	22.8
Cut in VDC	11.7	24.2


Dimensions

Height	inch	A	5.39
		B	5.32
		B1	5.04
		B2	2.87
Suction connector	location/I.D. inch angle	C	0.252-0259 40°
	material comment	Cu-plated steel Al cap	
Process connector	location/I.D. inch angle	D	0.252-0259 45°
	material comment	Cu-plated steel Al cap	
Discharge connector	location/I.D. inch angle	E	0.202-0.205 21°
	material comment	Cu-plated steel Al cap	
Remarks: inch connectors			

Approvals

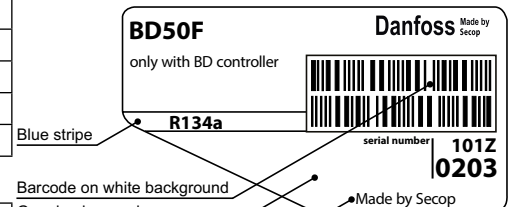

- S = Static cooling normally sufficient
 O = Oil cooling
 F₁ = Fan cooling 1.5 m/s
 (compressor compartment temperature equal to ambient temperature)
 F₂ = Fan cooling 3.0 m/s necessary
 SG = Suction gas cooling normally sufficient
 — = not applicable in this area

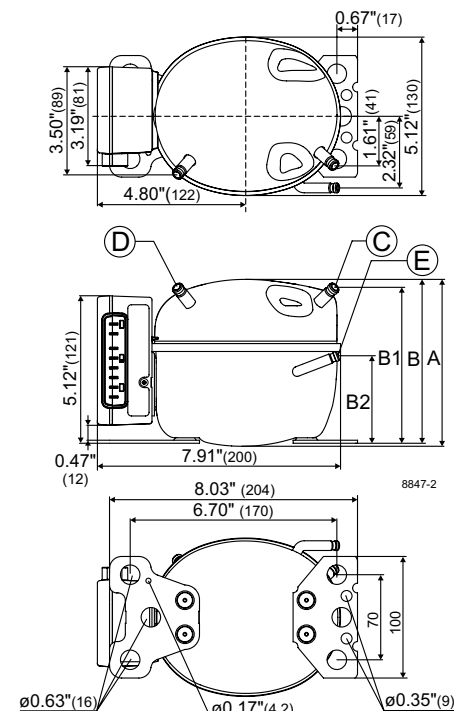

Capacity (ASHRAE LBP)							12V DC, static cooling					BTU/h
rpm \ °F	-20	-13	-10	0	10	14	20	30	40	41	45	50
2,000	96	127	142	202	274	307	360	459	572	584*	633*	698*
2,500	119	156	174	245	334	375	442	572	724	741*	810*	
3,000	143	189	211	297	403	452	531	682	858*			
3,500	168	219	244	342	464	520*	613*	792*				

Capacity (EN 12900 Household/CECOMAF)							12V DC, static cooling						watt
rpm \ °F	-20	-13	-10	0	10	14	20	30	40	41	45	50	
2,000	22.8	30.1	33.7	47.8	65.1	72.8	85.4	109	135	138*	150*	165*	
2,500	28.2	37.0	41.3	58.1	79.1	88.7	105	135	171	175*	191*		
3,000	33.9	44.8	50.1	70.5	95.6	107	126	161	203*				
3,500	40.0	52.0	57.9	81.0	110	123*	145*	187*					

Power consumption							12V DC, static cooling							watt
rpm \ °F	-20	-13	-10	0	10	14	20	30	40	41	45	50		
2,000	26.4	31.4	33.5	40.5	47.4	50.3	54.8	63.0	72.2	73.2*	77.3*	82.8*		
2,500	32.8	39.5	42.3	51.7	60.9	64.6	70.2	79.6	89.3	90.3*	94.4*			
3,000	39.9	48.0	51.4	62.5	73.2	77.5	84.0	95.0	107*					
3,500	47.7	56.7	60.5	72.9	85.4	90.6*	98.7*	113*						

Current consumption (for 24V applications the following must be halved)													A
rpm \ °F	-20	-13	-10	0	10	14	20	30	40	41	45	50	
2,000	2.19	2.58	2.76	3.37	4.01	4.29	4.70	5.43	6.20	6.28*	6.60*	7.01*	
2,500	2.76	3.25	3.47	4.23	5.03	5.36	5.86	6.69	7.51	7.59*	7.91*		
3,000	3.38	3.99	4.26	5.16	6.08	6.46	7.03	7.99	8.98*				
3,500	4.04	4.69	4.98	6.00	7.09	7.55*	8.27*	9.51*					

EER (ASHRAE LBP)				12V DC, static cooling								BTU/Wh	
rpm \ °F	-20	-13	-10	0	10	14	20	30	40	41	45	50	
2,000	3.64	4.04	4.24	4.98	5.78	6.10	6.57	7.29	7.92	7.98*	8.19*	8.43*	
2,500	3.64	3.96	4.12	4.75	5.49	5.80	6.30	7.18	8.11	8.20*	8.58*		
3,000	3.58	3.93	4.10	4.76	5.51	5.82	6.32	7.18	8.06*				
3,500	3.53	3.86	4.03	4.69	5.43	5.74*	6.21*	6.99*					

COP (EN 12900 Household/CECOMAF)							12V DC, static cooling					W/W
rpm \ °F	-20	-13	-10	0	10	14	20	30	40	41	45	50
2,000	0.86	0.95	1.00	1.17	1.36	1.43	1.54	1.71	1.86	1.87*	1.92*	1.97*
2,500	0.86	0.94	0.97	1.12	1.29	1.37	1.48	1.69	1.90	1.92*	2.01*	
3,000	0.85	0.93	0.97	1.12	1.30	1.37	1.49	1.68	1.89*			
3,500	0.84	0.92	0.95	1.11	1.28	1.35*	1.46*	1.64*				

* fan cooling of electronic unit compulsory

Test conditions with electronic units		EN 12900/CECOMAF	ASHRAE LBP
Condensing temperature	101N0212 101N0650	131°F	130°F
Ambient temperature		90°F	90°F
Suction gas temperature		90°F	90°F
Liquid temperature		no subcooling	90°F

Accessories for BD50F		Code number
Bolt joint for one comp.	Ø: 5/8 in.	118-1917
Bolt joint in quantities	Ø: 5/8 in.	118-1918
Snap-on in quantities	Ø: 5/8 in.	118-1919
Remote kit (without cable)		105N9210
One Wire/LIN gateway		105N9501
DC usage:	Automobile fuse, DIN 7258 12V: 15A 24V: 7.5 A	Not deliverable from Secop
AC usage:	Fuse, 100-240V	
	Main switch	min. 20A
	Main switch	min. 6A

Compressor speed

Electronit unit	Resistor (R1) [Ω]	Motor speed	Control circuit current [mA]
Code number	calculated values	[rpm]	
101N0212 101N0510 101N0650	0	2,000	5
	277	2,500	4
	692	3,000	3
101N0340 with AEO	1523	3,500	2
	0	AEO	6
	173	2,000	5
	450	2,500	4
	865	3,000	3
	1696	3,500	2

In AEO (Adaptive Energy Optimizing) speed mode the BD compressor will always adapt its speed to the actual cooling demand.

Wire dimensions DC

Size		Max. length* 12V operation		Max. length* 24V operation	
Cross section [mm²]	AWG [Gauge]	[m]	[ft.]	[m]	[ft.]
2.5	12	2.5	8	5	16
4	12	4	13	8	26
6	10	6	20	12	39
10	8	10	33	20	66

*Length between battery and electronic unit

Wire dimensions AC

Cross section min. 0.75 mm² or AWG 18

Operational errors

Error code or LED flashes	Error type
	Can be read out in the software TOOL4COOL®
6	Thermostat failure (If the NTC thermistor is short-circuit or has no connection).
5	Thermal cut-out of electronic unit (If the refrigeration system has been too heavily loaded, or if the ambient temperature is high, the electronic unit will run too hot).
4	Minimum motor speed error (If the refrigeration system is too heavily loaded, the motor cannot maintain minimum speed at approximately 1,850 rpm).
3	Motor start error (The rotor is blocked or the differential pressure in the refrigeration system is too high (>5 bar)).
2	Too many start attempts or fan over current (Too many compressor or fan starts in short time or fan current higher than 0.5A _{avg}).
1	Battery protection cut-out (The voltage is outside the cut-out setting).

